
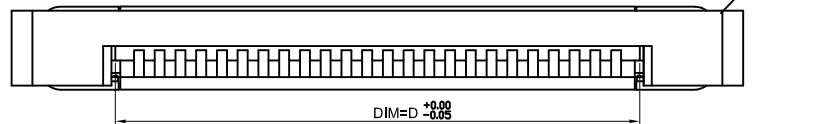
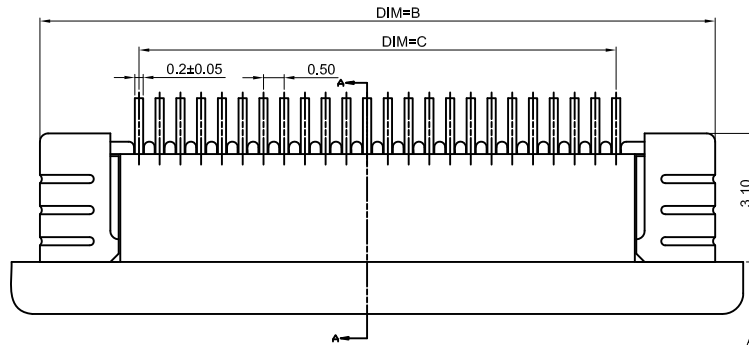
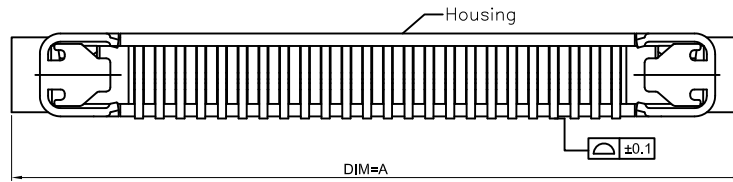


A					B				
PIN	A	B	C	D	PIN	A	B	C	D
4	7.60	6.50	1.50	2.60	33	22.10	21.00	16.00	17.10
5	8.10	7.00	2.00	3.10	34	22.60	21.50	16.50	17.60
6	8.60	7.50	2.50	3.60	35	23.10	22.00	17.00	18.10
7	9.10	8.00	3.00	4.10	36	23.60	22.50	17.50	18.60
8	9.60	8.50	3.50	4.60	37	24.10	23.00	18.00	19.10
9	10.10	9.00	4.00	5.10	38	24.60	23.50	18.50	19.60
10	10.60	9.50	4.50	5.60	39	25.10	24.00	19.00	20.10
11	11.10	10.00	5.00	6.10	40	25.60	24.50	19.50	20.60
12	11.60	10.50	5.50	6.60	41	26.10	25.00	20.00	21.10
13	12.10	11.00	6.00	7.10	42	26.60	25.50	20.50	21.60
14	12.60	11.50	6.50	7.60	43	27.10	26.00	21.00	22.10
15	13.10	12.00	7.00	8.10	44	27.60	26.50	21.50	22.60
16	13.60	12.50	7.50	8.60	45	28.10	27.00	22.00	23.10
17	14.10	13.00	8.00	9.10	46	28.60	27.50	22.50	23.60
18	14.60	13.50	8.50	9.60	47	29.10	28.00	23.00	24.10
19	15.10	14.00	9.00	10.10	48	29.60	28.50	23.50	24.60
20	15.60	14.50	9.50	10.60	49	30.10	29.00	24.00	25.10
21	16.10	15.00	10.00	11.10	50	30.60	29.50	24.50	25.60
22	16.60	15.50	10.50	11.60	51	31.10	30.00	25.00	26.10
23	17.10	16.00	11.00	12.10	52	31.60	30.50	25.50	26.60
24	17.60	16.50	11.50	12.60	53	32.10	31.00	26.00	27.10
25	18.10	17.00	12.00	13.10	54	32.60	31.50	26.50	27.60
26	18.60	17.50	12.50	13.60	55	33.10	32.00	27.00	28.10
27	19.10	18.00	13.00	14.10	56	33.60	32.50	27.50	28.60
28	19.60	18.50	13.50	14.60	57	34.10	33.00	28.00	29.10
29	20.10	19.00	14.00	15.10	58	34.60	33.50	28.50	29.60
30	20.60	19.50	14.50	15.60	59	35.10	34.00	29.00	30.10
31	21.10	20.00	15.00	16.10	60	35.60	34.50	29.50	30.60
32	21.60	20.50	15.50	16.60					




CUSTOMER DRAWING

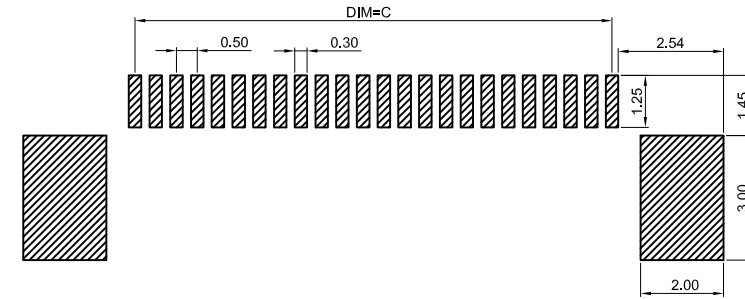

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		MASS-PRODUCTION	06/20/2017	James

Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: ≤ 20mΩ
 Insulation resistance: ≥ 500mΩ
 Relative Humidity: 93%+40°C

Material Description:
 Terminal: Phosphor Bronze Tin-Leadplated
 Fitting Nail: Brass Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

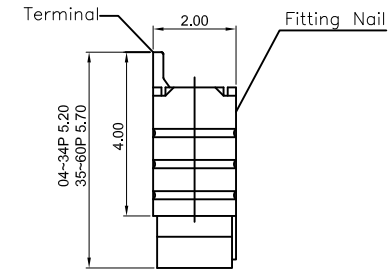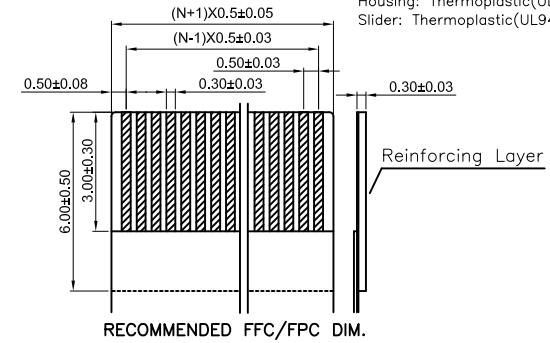

NOTES:

- 1.PLASTIC BURRS 0.1mm MAX
- 2.PART NO. SPECIFICATION: 11-44-XX01-12

44:UPPER CONTACT
 NO. OF CONTACT CODE

PACK:
 1:Tape
 2:Reel

Plating code:
 1: Tin-Leadplated
 2: Gold flash
 3: Gold 3μ"
 4: Gold 5μ"

TOLERANCE UNIT(mm)	APPROVALS	DATE
X. ±0.40	DRAWN	
X.X ±0.30	CHECKED	
X.XX ±0.20	APPROVED	
X.XXX ±0.10		
ANGULAR ±2°		
UNLESS OTHERWISE SPECIFIED		

CSG Industrial Co.,Ltd http://www.csg-china.com			
TITLE 0.50mm Pitch FPC(H 2.00)			
SCALE N.A.	PART NO. 11-44-XX01-XX	DRAWING NO. 11-44-XX01-XX A	REV. A
SHEET 1 OF 1	CUSTOMER CODE	CUSTOMER PART NO.	